

## Zero U Mount PDU

277Vac Rack Mount PDU

### Data Sheet

Ease of installation  
Space efficient  
Zero U space mounting  
Flexible top or down port access  
Multiple output voltage options

### SPECIAL FEATURES

- Multiple output receptacles for 277Vac line voltage
- Available Output receptacles for 240Vac line voltage
- 61.6 kVA maximum power capacity

### COMPLIANCE


- FCC Class A EMI
- CISPR 22 Class A EMI
- RoHS

### SAFETY

- UL 60950

### INTERFACES

- RF 203P-M for 277Vac
- Each pair protected by a 2-pole 20A breaker
- IEC320 C13 for 240Vac

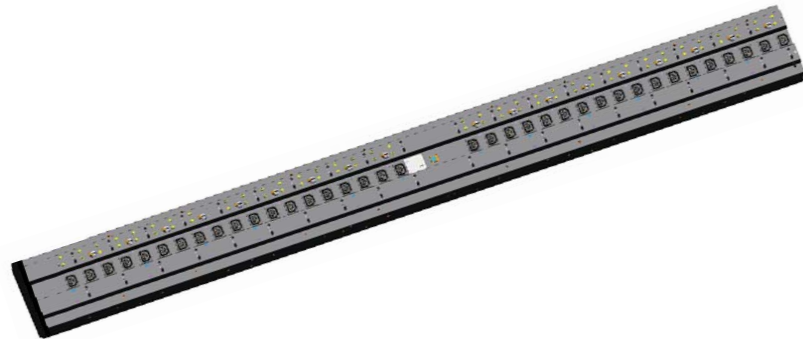

### Electrical Specifications

Input						
Input range	Three Phase: 432 to 528Vac, 480Vac nominal *249 to 305Vac per phase, 277Vac nominal					
Connection Type	Three-phase Wye, 100A, 4-phase, 5-wire pin and sleeve plug					
Frequency	57 Hz to 63 Hz					
Input Current	100 A maximum					
Conducted EMI	Class A					
Radiated EMI	Class A					
Output						
	277Vac Outlets			240Vac Outlets		
	Min	Nom	Max	Min	Nom	Max
Output Voltage	249Vac	277Vac	305Vac	180Vac	240Vac	264Vac
Output Frequency	57	60	63	57	60	63
Output Current			??			??
Over-current Protection	20A Breaker			10A Breaker		

### Environmental Specifications

Operating Temperature	5 to 57 °C
Relative Humidity, Operating	8 to 85°C, non-condensing
Storage Conditions	-40 to +60 °C, 5 to 100% RH including condensation
Altitude	5,000 m
MTBF	>100 khours at full load, 25°C ambient temperature per Telcordia SR332 Issue 1 (Method 1, Case 3)

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**  
EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)