

# POWER

## PS1000 and PL1000

High Availability Power Supply Units

### Data Sheet

**Total Power:** 1000 W  
**Output:** 12.25 Vdc



### SPECIAL FEATURES

- Fault mode resiliency
- Dynamic maximum input power limit (DMIPL)
- AC feed failure, automatic switchover
- Inrush current control
- N+1 internal redundant
- PMBus® compliant

### COMPLIANCE

- EMC Conducted/Radiated Class A
- EMC EN/IEC 61000
- RoHS

### SAFETY


- UL/CSA 60950 (UL recognized)
- IEC 60950
- CE Mark

The Artesyn PS1000 is a high availability server power supply unit (PSU) developed for hyperscale cloud deployments. The Artesyn PL1000 PSU is also available with an embedded battery backup unit (BBU).

The PS1000 and PL1000 were designed to support an open source hardware development effort through Open Compute Project (OCP) collaboration under the Microsoft Project Olympus initiative. The PS1000 and PL1000 support a new standard building block model for OCP solution providers to develop hardware solutions from a common design.


### Electrical Specifications

PS1000			
Output power	1000 W total		
Redundancy	680 W N+1 (3 x 340 W PSU modules in parallel)		
Output voltage	12.25 Vdc		
Phases	Dual three-phase AC input with input voltage selector (IVS)		
Efficiency	>92% at full load		
Input voltage	Three-phase 415/400 Vac Wye or 208 Vac Delta or Single-phase 200-240 Vac		
Operating temp	10 °C to 48 °C		
PL1000			
BBU	Embedded 8-cell, 32 V pack battery backup unit		
BBU specification	The battery shall operate for up to 1.0 second at 680 W. Then after that the PSU shall be capable to output 105 kJ between 100 W and 300 W. Typical run times are shown below:		
	Power Level (W)	Runtime (s)	Energy (kJ)
	100	1050	105
	150	700	105
	200	525	105
	250	420	105
300	350	105	
Operating temp	10 °C to 48 °C		

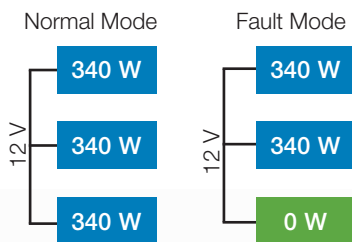


## Mechanical Drawings

Front view

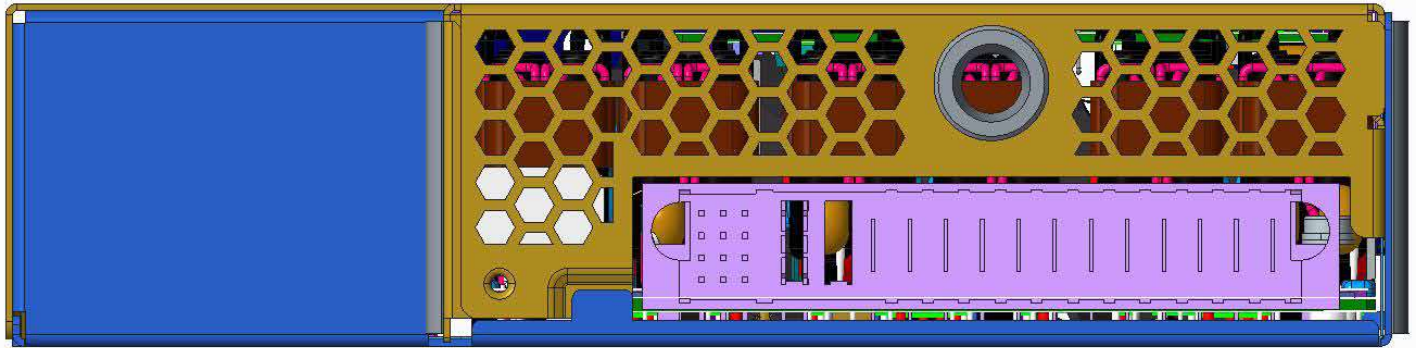

Rear view

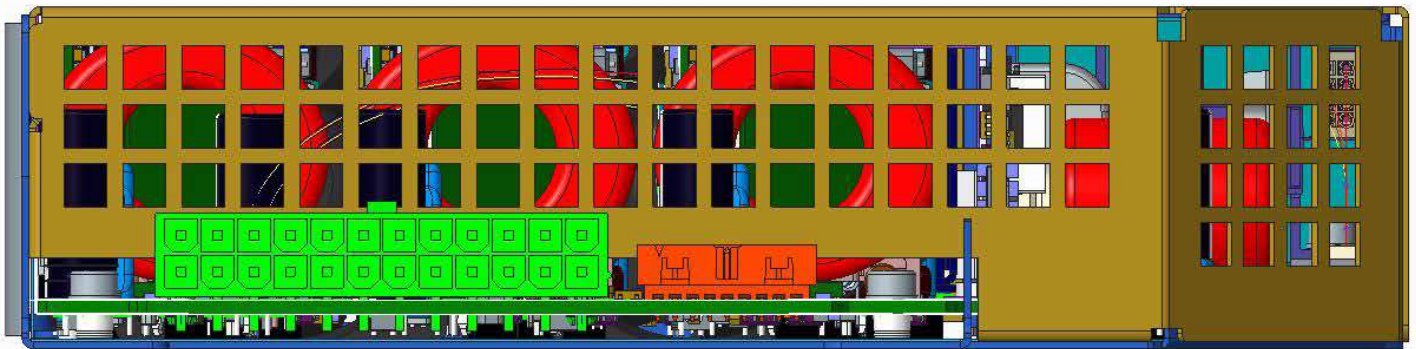

## Ordering Information

Model Number	Main Output	With Batteries	Availability
PL1000	12.25 V	Y	October 2017
PS1000	12.25 V	N	October 2017

## WORLDWIDE OFFICES

### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

### Europe (UK)

Ground Floor Offices, Barbary House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

PL1000-PS1000 DS 23Dec2019